

# To stick or to slip: Lyapunov-based reset PID for positioning systems with Coulomb and Stribeck friction

**Luca Zaccarian**


LAAS-CNRS Toulouse (France) and University of Trento (Italy)

17th International Conference on Advanced Motion Control  
Padova (Italy), February 19, 2022

# Outline

- 1 Problem description and model
- 2 Coulomb Friction and Asymptotic Convergence
- 3 Reset PID with Coulomb friction for Transient Improvement
- 4 Hybrid Automaton and Exponential Convergence
- 5 Reset PID with Stribeck Effect for Stability Recovery
- 6 Conclusions and acknowledgments

# Coulomb friction and discontinuous right-hand side

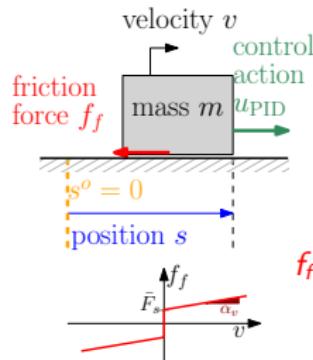

$$\begin{aligned} u_{\text{PID}}(t) &:= -\bar{k}_p s(t) - \bar{k}_i \int_0^t s(\tau) d\tau - \bar{k}_d \frac{ds(t)}{dt} \\ &= -\bar{k}_p s(t) - \bar{k}_i e_i(t) - \bar{k}_d v(t), \end{aligned}$$

$$f_f(u_{\text{PID}}, v) := \begin{cases} \bar{F}_s \text{ sign}(v) + \alpha_v v, & \text{if } v \neq 0 \\ u_{\text{PID}}, & \text{if } v = 0, |u_{\text{PID}}| < \bar{F}_s \\ \bar{F}_s \text{ sign}(u_{\text{PID}}), & \text{if } v = 0, |u_{\text{PID}}| \geq \bar{F}_s \end{cases}$$

$$m\dot{v} = u_{\text{PID}} - f_f(u_{\text{PID}}, v)$$

- ▷ PID action and viscous force combined in  $u := \frac{u_{\text{PID}} - \alpha_v v}{m}$   $u_{\text{PID}} = m u$  for  $v = 0$
- ▷ normalize physical param's  $\bar{k}_p, \bar{k}_i, \bar{k}_d, \bar{F}_s$  as  $(k_p, k_v, k_i) := \left(\frac{\bar{k}_p}{m}, \frac{\bar{k}_d + \alpha_v}{m}, \frac{\bar{k}_i}{m}\right)$ ,  $F_s := \frac{\bar{F}_s}{m}$

$$\dot{e}_i = s$$



$$\dot{s} = v$$

$$\dot{v} = \begin{cases} u - F_s & \text{if } v > 0 \text{ or } (v = 0, u \geq F_s) \\ 0 & \text{if } (v = 0, |u| < F_s) \\ u + F_s & \text{if } v < 0 \text{ or } (v = 0, u \leq -F_s) \end{cases}$$


$$u = -k_p s - k_v v - k_i e_i,$$

# The problem is industrially relevant with Coulomb effect

Industrial High-precision motion control system (electron microscope) experiments:


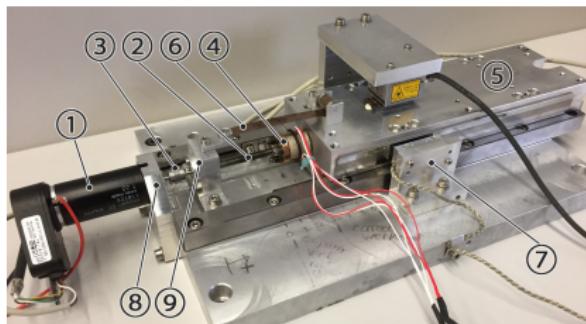
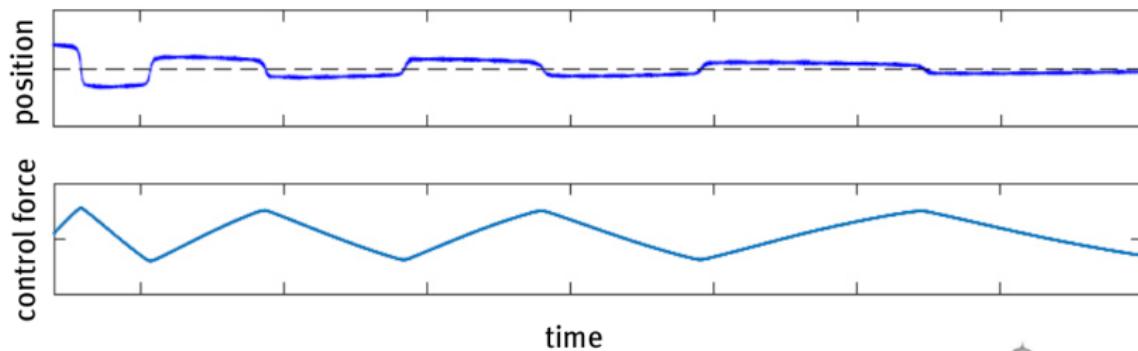


Measured friction nonlinearity points

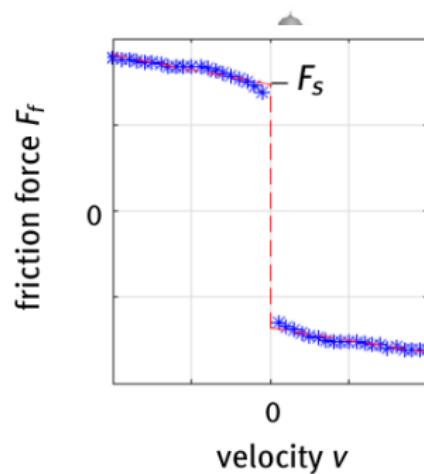

# Experiments show instability with Stribeck effect

- Stribeck effect causes “hunting” instability with PID feedback

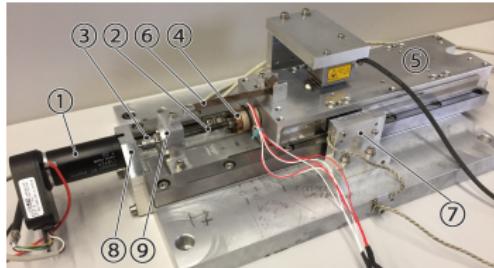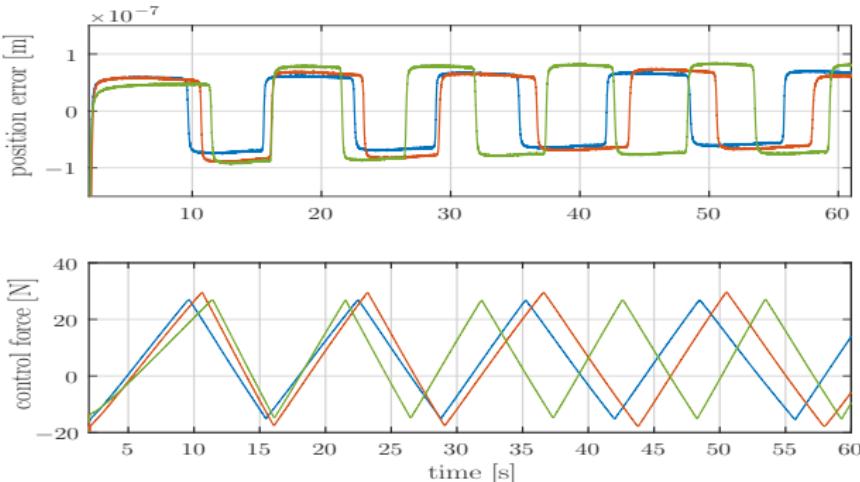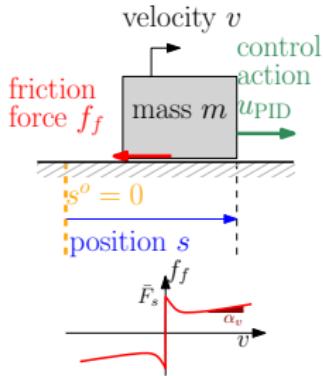

Same experimental device  
shows Stribeck with different  
ambient, lubrication and wear  
conditions

# Reformulation as a suitable differential inclusion

$$\dot{e}_i = s$$

$$\dot{s} = v$$

$$u = -k_i e_i - k_p s - k_v v,$$

$$u - \dot{v} = \begin{cases} +F_s & \text{if } v > 0 \\ \text{sat}_{F_s}(u) & \text{if } v = 0 \\ -F_s & \text{if } v < 0 \end{cases}$$



$$\dot{e}_i = s$$



$$\dot{s} = v$$

$$\dot{v} \in \underbrace{-k_i e_i - k_p s - k_v v}_{u=} - F_s \text{SGN}(v)$$

differential inclusions in general

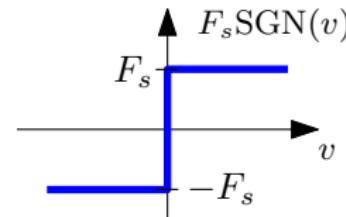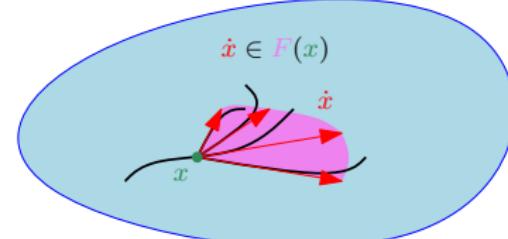

- **Physical model:** intuitive, but hard to prove existence of solutions and stability properties with a discontinuous right hand side
- **Differential inclusion:** existence of solutions and *ad hoc* Lyapunov tools

**Lemma BASIC (solutions are unique and complete)**

For any initial condition  $z(0) = (e_i(0), s(0), v(0)) \in \mathbb{R}^3$ , the green differential inclusion has a unique solution defined for all  $t \geq 0$ .

# A partial literature overview

The interest in dynamics with friction had its peak in the 1990's.


- modeling direction
  - Dahl model:  
*P. R. Dahl, A solid friction model. Tech. Rep. of The Aerospace Corporation El Segundo CA, 1968.*
  - models by Bliman and Sorine:  
*P.-A. Bliman and M. Sorine, Easy-to-use realistic dry friction models for automatic control. Proc. of 3rd European Control Conf., 1995.*
  - LuGre model:  
*C. Canudas-de-Wit, H. Olsson, K. J. Åström, and P. Lischinsky, A new model for control of systems with friction. IEEE Trans. Autom. Control, 1995.*  
*K. J. Åström and C. Canudas-de-Wit, Revisiting the LuGre friction model. Control Systems, IEEE, 2008.*  
*N. Barabanov and R. Ortega, Necessary and sufficient conditions for passivity of the LuGre friction model. IEEE Trans. Autom. Control, 2000.*
  - Leuven model:  
*J. Swevers, F. Al-Bender, C. G. Ganseman, and T. Projogo, An integrated friction model structure with improved presliding behavior for accurate friction compensation. IEEE Trans. Autom. Control, 2000.*

# Set-valued friction and PID control

- use of set-valued mapping for the friction force, and hence differential inclusions
  - uncontrolled multi-degree-of-freedom mechanical systems:  
*N. van de Wouw and R. I. Leine, Attractivity of equilibrium sets of systems with dry friction.* Nonlinear Dynamics, 2004.
  - PD controlled 1 d.o.f. system:  
*D. Putra, H. Nijmeijer, and N. van de Wouw, Analysis of undercompensation and overcompensation of friction in 1 DOF mechanical systems.* Automatica, 2007.
  - combination of set-valued friction laws and Lyapunov tools:  
*R. I. Leine and N. van de Wouw, Stability and convergence of mechanical systems with unilateral constraints.* Springer Science & Business Media, 2007.
  - stability of compact attractors  
*V.A. Yakubovich, G.A. Leonov, and A.K. Gelig, Stability of Stationary Sets in Control Systems with Discontinuous Nonlinearities,* World Scientific, 2004.
- for the same setting (point mass + PID controller), with Coulomb and viscous friction only it was proven that no stick-slip limit cycle (so-called hunting) exist:
  - B. Armstrong-Hélouvry and B. Amin, *PID control in the presence of static friction: exact and describing function analysis.* Amer. Control Conf., 1994.
  - B. Armstrong and B. Amin, *PID control in the presence of static friction: A comparison of algebraic and describing function analysis.* Automatica, 1996.

# Coulomb-only friction provides an initially simplified setting

- Coulomb friction experience suggests (slow) convergence and stability

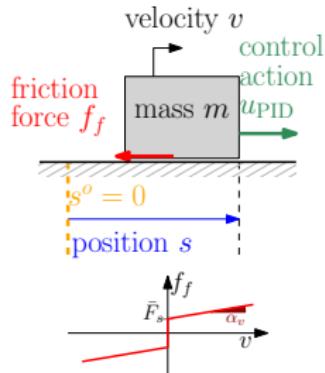

Green equations with  $z = (e_i, s, v)$  are

$$\begin{aligned}\dot{z} &= \begin{bmatrix} \dot{e}_i \\ \dot{s} \\ \dot{v} \end{bmatrix} \in \begin{bmatrix} s \\ v \\ -k_i e_i - k_p s - k_v v - F_s \text{SGN}(v) \end{bmatrix} \\ &= \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -k_i & -k_p & -k_v \end{bmatrix} z - \begin{bmatrix} 0 \\ 0 \\ F_s \end{bmatrix} \text{SGN}(v)\end{aligned}$$

- Standing assumption about the PID gains is probably necessary for GAS

## Assumption LIN

In the absence of friction ( $F_s = 0$ ), the origin is globally asymptotically stable (GAS). Equivalently,

$$k_i > 0, k_p > 0, k_v k_p > k_i.$$

# With Coulomb Friction the largest set of equilibria is GAS

## Assumption LIN

In the absence of friction ( $F_s = 0$ ), the origin is globally asymptotically stable (GAS). Equivalently,

$$k_i > 0, k_p > 0, k_v k_p > k_i.$$

- For  $z = (e_i, s, v)$  and

$$\dot{e}_i = s$$

$$\dot{s} = v$$

$$\dot{v} \in -k_i e_i - k_p s - k_v v - F_s \text{SGN}(v)$$

the set of equilibria making  $\dot{z} = 0$  are  $s = v = 0$  and  $|e_i| \leq \frac{F_s}{k_i}$ .

- Denote the corresponding set (it depends on  $k_i$ !!)

$$\mathcal{A} := \left\{ (e_i, s, v) : s = 0, v = 0, e_i \in \left[ -\frac{F_s}{k_i}, \frac{F_s}{k_i} \right] \right\}.$$

## Theorem C-GAS (Coulomb-GAS) Bisoffi et al. [2018]

With Coulomb friction, under Assumption LIN, set  $\mathcal{A}$  is 1) globally attractive and 2) Lyapunov stable  $\Leftrightarrow \exists \beta \in \mathcal{KL}$  such that  $|z(t)|_{\mathcal{A}} \leq \beta(|z(0)|_{\mathcal{A}}, t)$ ,  $\forall t \geq 0$ .





# Illustration by simulation is informative

▷  $f_c = 1 \text{ m/s}^2$

$$(k_v, k_p, k_i) = (6.4, 3, 4)$$



→ complex conjugate roots

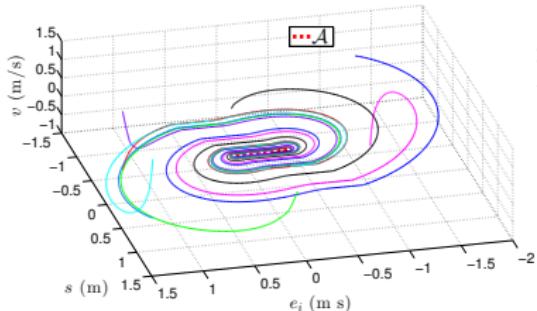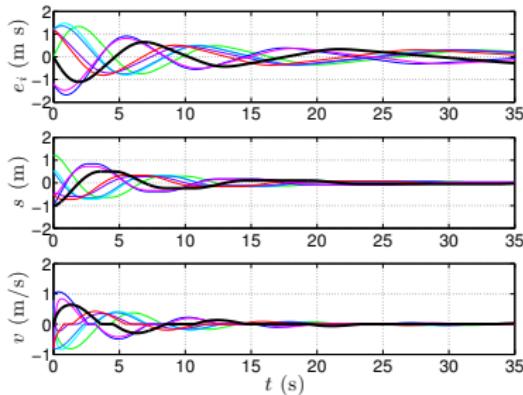

$$\dot{z} \in \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -k_i & -k_p & -k_v \end{bmatrix} \begin{bmatrix} e_i \\ s \\ v \end{bmatrix} - \begin{bmatrix} 0 \\ 0 \\ f_c \end{bmatrix} \text{SGN}(v)$$

$$(k_v, k_p, k_i) = (1.5, 0.66, 0.08)$$

→ three distinct real roots

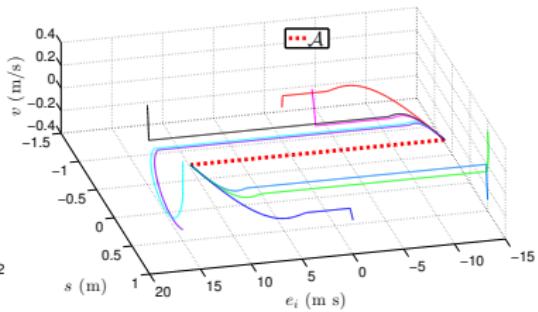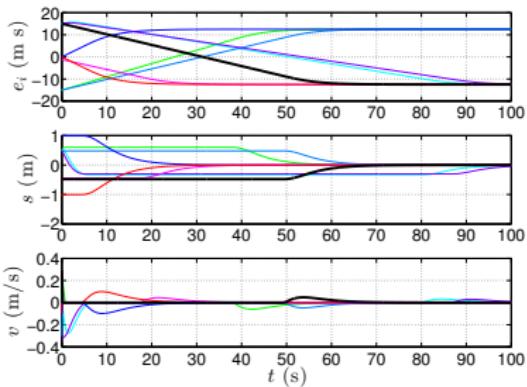

# Change of coordinates simplifies $\mathcal{A}$

- Apply change of coordinates

$$\sigma := -k_i s$$

$$\phi := -k_i e_i - k_p s \quad \text{to} \quad \dot{z} := \begin{bmatrix} \dot{e}_i \\ \dot{s} \\ \dot{v} \end{bmatrix} \in \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -k_i & -k_p & -k_v \end{bmatrix} z - \begin{bmatrix} 0 \\ 0 \\ F_s \end{bmatrix} \text{SGN}(v)$$

$$v := v$$

- ... and get dynamics


$$\begin{aligned} \dot{x} := \begin{bmatrix} \dot{\sigma} \\ \dot{\phi} \\ \dot{v} \end{bmatrix} &\in \begin{bmatrix} -k_i v \\ \sigma - k_p v \\ \phi - k_v v - F_s \text{SGN}(v) \end{bmatrix} = \begin{bmatrix} 0 & 0 & -k_i \\ 1 & 0 & -k_p \\ 0 & 1 & -k_v \end{bmatrix} \begin{bmatrix} \sigma \\ \phi \\ v \end{bmatrix} - \begin{bmatrix} 0 \\ 0 \\ F_s \end{bmatrix} \text{SGN}(v) \\ &= \mathbf{A}x - \mathbf{b} \text{SGN}(v) =: F(x) \end{aligned}$$

- Attractor (simpler expression independent of  $k_i$ )

$$\mathcal{A} = \{(\sigma, \phi, v) : |\phi| \leq F_s, \sigma = 0, v = 0\}$$

- Distance to attractor

$$|x|_{\mathcal{A}}^2 := (\inf_{y \in \mathcal{A}} |x - y|)^2 = \sigma^2 + v^2 + dz_{F_s}(\phi)^2$$

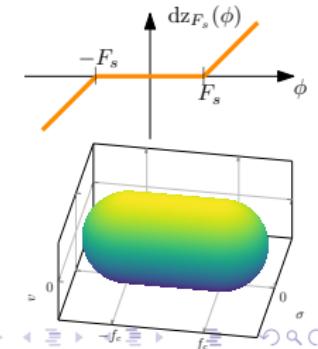


# Lyapunov-like function is discontinuous!!


Bisoffi et al. [2018]

$$\begin{aligned}
 V(x) &:= \begin{bmatrix} \sigma \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ v \end{bmatrix} + \min_{f \in F_s \text{ SGN}(v)} |\phi - f|^2 \\
 &= \min_{f \in F_s \text{ SGN}(v)} \begin{bmatrix} \sigma \\ \phi-f \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & 0 & -1 \\ 0 & 1 & 0 \\ -1 & 0 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ \phi-f \\ v \end{bmatrix} = \min_{f \in F_s \text{ SGN}(v)} \begin{bmatrix} \sigma \\ \phi-f \\ v \end{bmatrix}^T P \begin{bmatrix} \sigma \\ \phi-f \\ v \end{bmatrix}
 \end{aligned}$$

complex conjugate roots

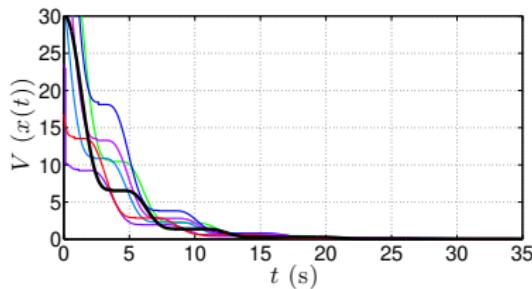

three distinct real roots

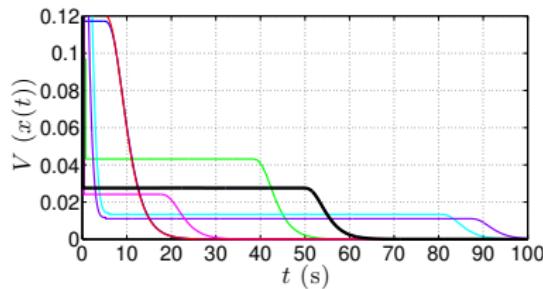

- Immediate to check:

- $V(x) = 0$  if and only if  $x \in \mathcal{A}$
- $V$  is not continuous

for  $\{(\sigma_i, \phi_i, v_i)\}_{i=0}^{+\infty} = \{(0, 0, (\frac{1}{2})^i)\}_{i=0}^{+\infty}$ ,  $V$  converges to  $F_s^2$  but  $V(0) = 0$

# Properties of the Lyapunov-like function $V$

Bisoffi et al. [2018]

$$V(x) := \begin{bmatrix} \sigma \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ v \end{bmatrix} + \min_{f \in F_s \text{ SGN}(v)} |\phi - f|^2$$

## Properties of $V$

The Lyapunov-like function  $V$  is:

- ① **lower semicontinuous (lsc)**

$$V(\bar{x}) \leq \lim_{x \rightarrow \bar{x}} V(x), \quad \forall \bar{x} \in \mathbb{R}^3 \quad (\text{Regularity})$$

- ② **lower bounded:** There exist  $c_1, c_2 > 0$  such that

$$c_1|x|_A^2 \leq V(x) \leq c_2|x|_A^2 + 2F_s^2 \quad \forall x \in \mathbb{R}^3 \quad (\text{Sandwich})$$

- ③ **decreasing along trajectories:**  $\exists c > 0$ : for each solution  $x = (\sigma, \phi, v)$ ,



$$\forall t_2 \geq t_1 \geq 0, \quad V(x(t_2)) - V(x(t_1)) \leq -c \int_{t_1}^{t_2} v(t)^2 dt. \quad (\text{Flow})$$

- Proof of Theorem C-GAS given in Bisoffi et al. [2018] using:

- auxiliary function and state partition for **stability**
- Integral invariance principle of E.P. Ryan (1999) for **attractivity**

# A closer look at the slow transients reveals promising ideas

- Solutions show long stick phases in the band  $\mathcal{E}_{\text{stick}} := \{x \in \mathbb{R}^3 : v = 0, |\phi| \leq F_s\}$

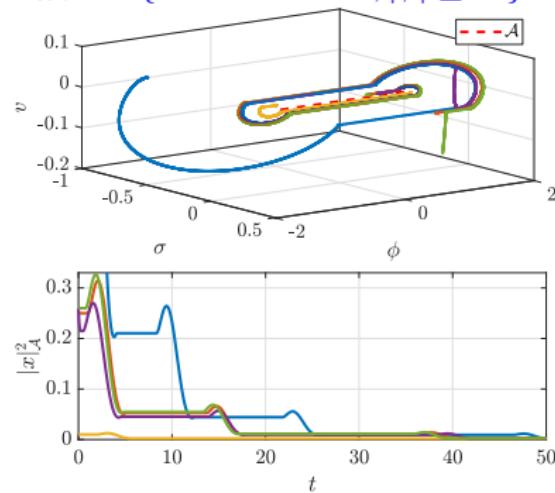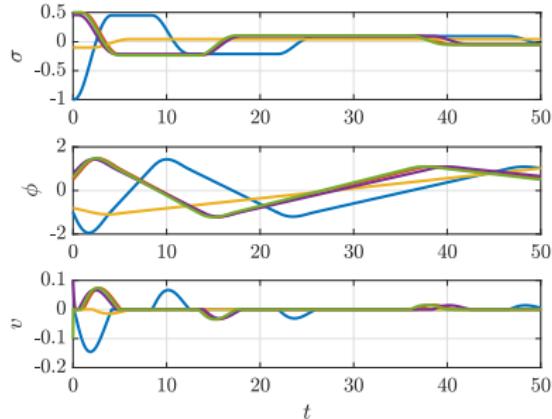

- Lyapunov function suggests reversing the sign of  $\phi$  (reset to  $-\phi$ ) when  $\phi v \leq 0$

$$V(x) := \begin{bmatrix} \sigma \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ v \end{bmatrix} + \min_{f \in F_s \text{ SGN}(v)} |\phi - f|^2$$

- Solutions would then jump across the band  $\mathcal{E}_{\text{stick}}$
- Time-regularized solutions (with timer  $\tau$ ) imposes dwell time  $t_{k+1} - t_k \geq \delta$

# Reset PID Control Design Improves Coulomb Transient

- Overall state involves  $x = (\sigma, \phi, v)$  and  $\tau \in [0, 2\delta]$ , that is  $(x, \tau) \in \mathbb{R}^3 \times [0, 2\delta]$
- Hybrid closed loop with reset PID (no knowledge of  $F_s$  required)


$$\begin{cases} \dot{x} \in F(x) := \begin{bmatrix} 0 & 0 & -k_i \\ 1 & 0 & -k_p \\ 0 & 1 & -k_v \end{bmatrix} \begin{bmatrix} \sigma \\ \phi \\ v \end{bmatrix} - \begin{bmatrix} 0 \\ 0 \\ F_s \end{bmatrix} \text{SGN}(v), & (x, \tau) \in \mathcal{C} := \overline{\mathbb{R}^3 \times [0, 2\delta] \setminus \mathcal{D}}, \\ \dot{\tau} = 1 - dz(\tau/\delta) \end{cases}$$

$$\begin{cases} x^+ = g(x) := [\sigma \quad -\alpha\phi \quad v]^\top, & (x, \tau) \in \mathcal{D} := \{(x, \tau) \mid \phi\sigma \leq 0, \phi v \leq 0, \tau \geq \delta\}, \\ \tau^+ = 0 \end{cases}$$

$F$  and  $g$  are the **flow and jump maps**,  $\mathcal{C}$  and  $\mathcal{D}$  are the **flow and jump sets**.

- Explanation of the jump set  $\mathcal{D}$ :



- $\phi\sigma \leq 0$  so the solution is overshooting
- $\phi v \leq 0$  so the Lyapunov function does not increase

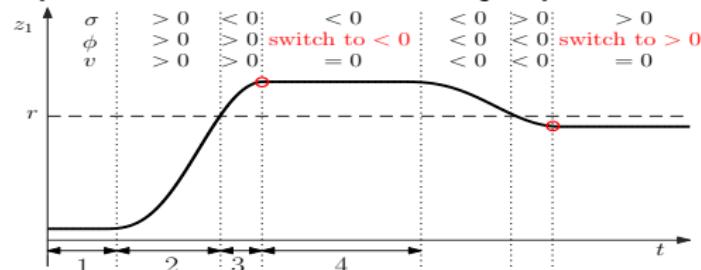

- Parameter  $\alpha \in [0, 1]$  tunes **robustness** ( $\alpha = 0$ ) vs **performance** ( $\alpha = 1$ )

# A closer look at the slow transients (recall)

- Solutions show long stick phases in the band  $\mathcal{E}_{\text{stick}} := \{x \in \mathbb{R}^3 : v = 0, |\phi| \leq F_s\}$





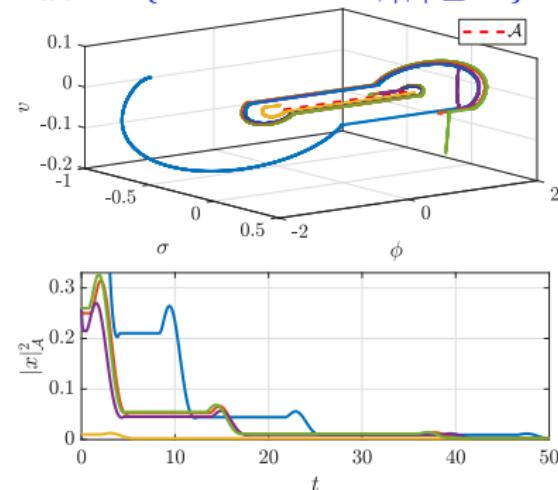
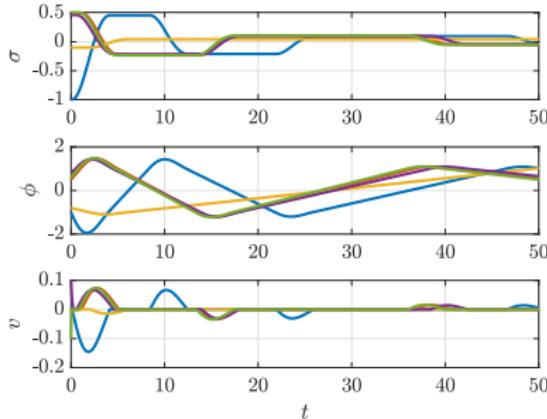


- Lyapunov function suggests reversing the sign of  $\phi$  (reset to  $-\alpha\phi$ ) when  $\phi v \leq 0$

$$V(x) := \begin{bmatrix} \sigma \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ v \end{bmatrix} + \min_{f \in F_s \text{ SGN}(v)} |\phi - f|^2$$

- Solutions would then jump across the band  $\mathcal{E}_{\text{stick}}$
- Time-regularized solutions (with timer  $\tau$ ) imposes dwell time  $t_{k+1} - t_k \geq \delta$

# Reset PID (with $\alpha = 1$ ) successfully jumps across $\mathcal{E}_{\text{stick}}$

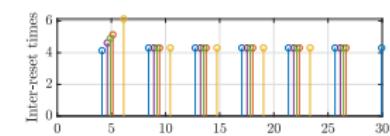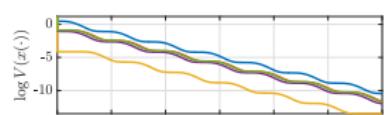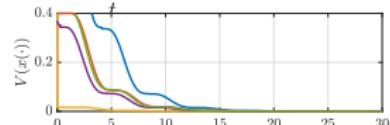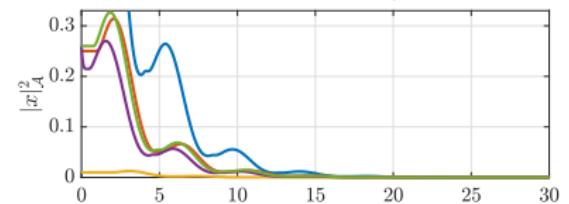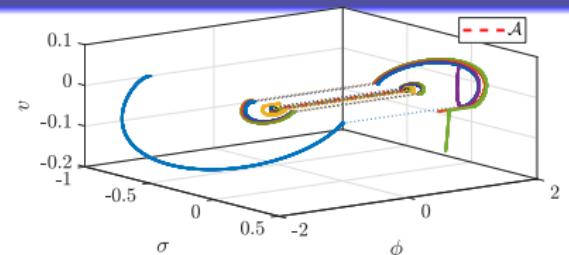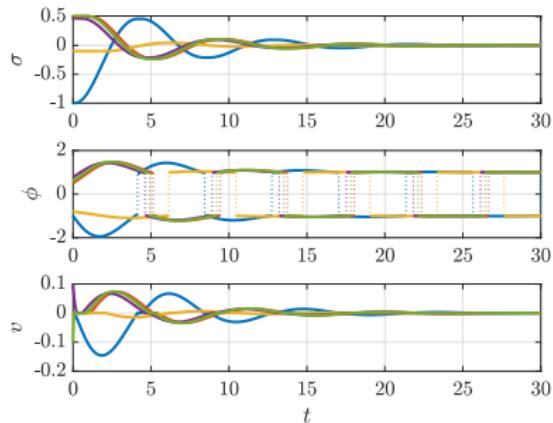

- Lyapunov decrease, and decrease of  $|x|_{\mathcal{A}}$  suggests exponential convergence
- Bad solutions sequence from  $x_k(0) = (\epsilon_k, 0, 0)$  satisfy:  
 $|x_k(t)|_{\mathcal{A}} = |x_k(0)|_{\mathcal{A}} = \epsilon_k$  for all  $t \leq T_k$ ,  
 with  $\lim_{k \rightarrow \infty} \epsilon_k = 0$  and  $\lim_{k \rightarrow \infty} T_k = +\infty$ .  
 thus **disproving exponential convergence**
- However exponential convergence seems to often occur

# The same Lyapunov function helps in the reset context

Recall the Lyapunov-like function:

$$V(x) := \begin{bmatrix} \sigma \\ v \end{bmatrix}^T \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \sigma \\ v \end{bmatrix} + \min_{f \in F_s \text{ SGN}(v)} |\phi - f|^2$$

Properties of  $V$  carry over from the non-reset case

Function  $V$  is **lower semicontinuous** and there exist  $c_1, c_2, c > 0$  such that:

$$c_1|x|_{\mathcal{A}}^2 \leq V(x) \leq c_2|x|_{\mathcal{A}}^2 + 2F_s^2 \quad \forall x \in \mathbb{R}^3 \quad (\text{Sandwich})$$

$$\begin{aligned} V(x(t_2, j)) - V(x(t_1, j)) &\quad \forall \text{ solution } (x, \tau) \\ &\leq -c \int_{t_1}^{t_2} v(t, j)^2 dt, \quad \forall (t_2, j) \geq (t_1, j) \in \text{dom } x \quad (\text{Flow}) \end{aligned}$$

$$V(g(x)) - V(x) \leq 0, \quad \forall (x, \tau) \in \mathcal{D} \quad (\text{Jump})$$


Theorem RC-GAS (Reset-Coulomb-GAS) Beerens et al. [2019]

With Coulomb friction, under Assumption LIN, set  $\mathcal{A}$  is  $\mathcal{KL}$ -GAS.

- **Stability proof:** same as before using extra (Jump) condition
- **Global attractivity proof:** uses meagre-limsup hybrid invariance principle

# Experimental response confirms transient improvement



Beerens et al. [2019]

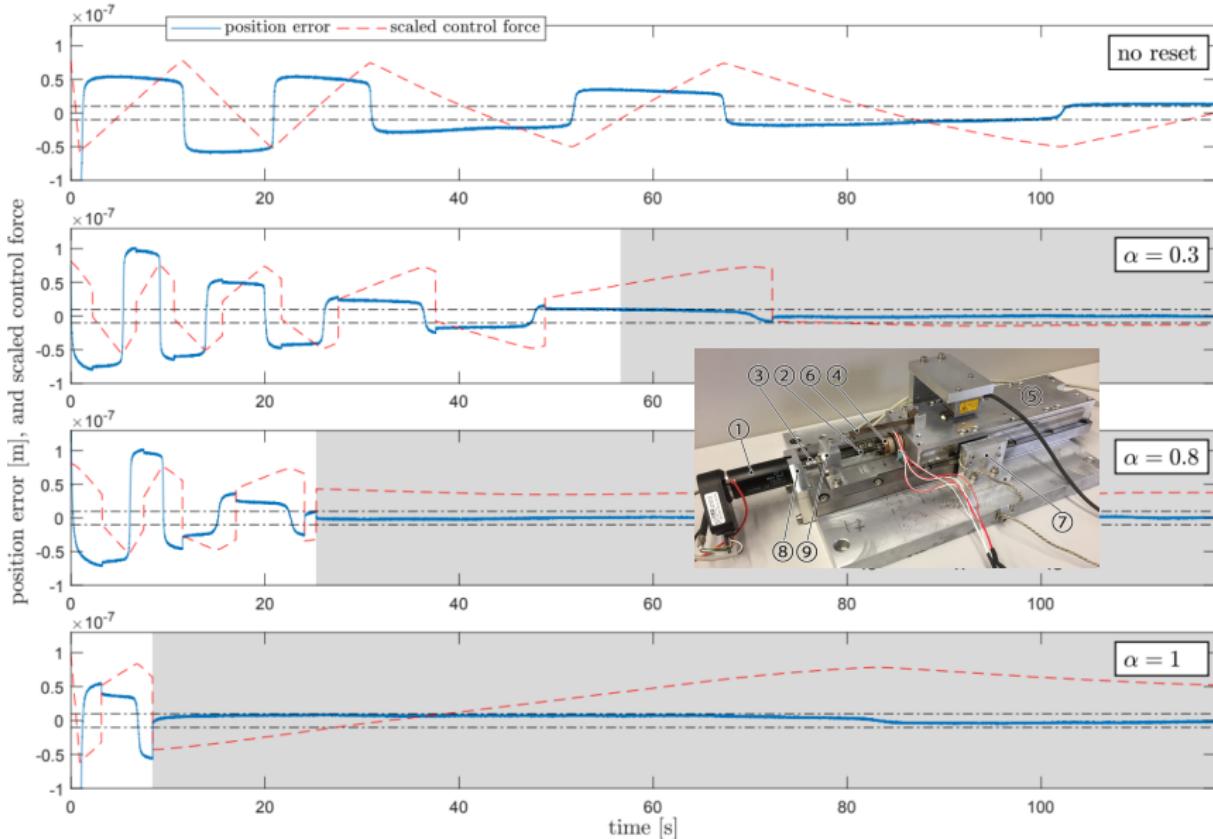

# Without resets, alternative hybrid automaton model

Bisoffi et al. [2019]

- Extended state  $\bar{x}$  includes timer  $\bar{\tau}$  and logic variable  $\bar{q}$  such that  $\bar{q}\bar{v} \geq 0$
- $$\bar{x} := (\bar{\sigma}, \bar{\phi}, \bar{v}, \bar{q}, \bar{\tau}) \in \bar{\Xi} := \{\bar{x} \in \mathbb{R}^3 \times \{-1, 0, 1\} \times [0, 2\delta] \mid \bar{q}\bar{v} \geq 0\},$$

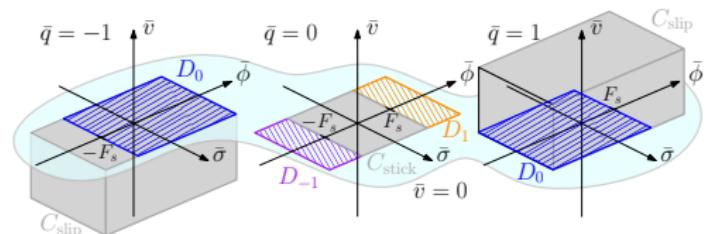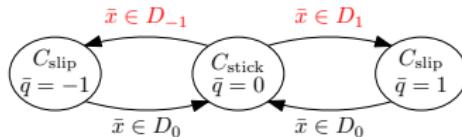

- Hybrid automaton  $\mathcal{H}_\delta$  (Coulomb, no resets) – semiglobally correct

$$\mathcal{H}_\delta : \begin{cases} \dot{\bar{x}} = \bar{f}(\bar{x}), & \bar{x} \in \bar{C} \\ \bar{x}^+ = \bar{g}(\bar{x}), & \bar{x} \in \bar{D} \end{cases}$$

$$\bar{C} := C_{\text{slip}} \cup C_{\text{stick}}$$

$$\bar{D} := D_{-1} \cup D_0 \cup D_1$$

$$C_{\text{slip}} := \{\bar{x} \in \bar{\Xi} : |\bar{q}| = 1\}$$

$$C_{\text{stick}} := \{\bar{x} \in \bar{\Xi} : \bar{q} = 0, \bar{v} = 0, |\bar{\phi}| \leq F_s\}$$

$$D_1 := \{\bar{x} \in \bar{\Xi} : \bar{q} = 0, \bar{v} = 0, \bar{\phi} \geq F_s, \bar{\tau} \in [\delta, 2\delta]\}$$

$$D_{-1} := \{\bar{x} \in \bar{\Xi} : \bar{q} = 0, \bar{v} = 0, \bar{\phi} \leq -F_s, \bar{\tau} \in [\delta, 2\delta]\}$$

$$D_0 := \{\bar{x} \in \bar{\Xi} : |\bar{q}| = 1, \bar{v} = 0, \bar{q}\bar{\phi} \leq F_s\}$$


- Smooth Lyapunov function certifies GAS of  $\bar{\mathcal{A}} := \{\bar{x} : \bar{\sigma} = \bar{v} = 0, \bar{\phi} \in F_s \text{SGN}(\bar{q})\}$

$$\bar{V}(\bar{x}) := \begin{bmatrix} \bar{\sigma} \\ \bar{v} \end{bmatrix}^\top \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \bar{\sigma} \\ \bar{v} \end{bmatrix} + |\bar{q}|(\bar{\phi} - \bar{q}F_s)^2 + (1 - |\bar{q}|)d\zeta_{F_s}^2(\bar{\phi}).$$

# Alternative proof of Theorem C-GAS uses function $\bar{V}$

Bisoffi et al. [2019]

- Same exact evolution for  $V$  (along original sol'ns  $x$ ) and  $\bar{V}$  (along sol'ns  $\bar{x}$  to  $\mathcal{H}_\delta$ )

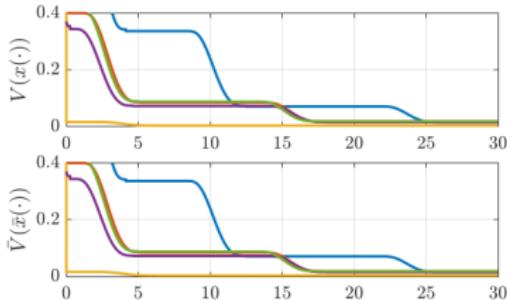

Properties of smooth  $\bar{V}$  are convenient

Function  $\bar{V}$  is **smooth** and there exist  $\alpha_1, \alpha_2 \in \mathcal{K}_\infty$ ,  $c > 0$  such that:

$$\alpha_1(|\bar{x}|_{\bar{\mathcal{A}}}) \leq \bar{V}(\bar{x}) \leq \alpha_2(|\bar{x}|_{\bar{\mathcal{A}}}) \quad \forall \bar{x} \in \bar{\Xi} \quad (\text{Sandwich})$$

$$\langle \nabla \bar{V}(\bar{x}), \bar{f}(\bar{x}) \rangle = -c\bar{v}^2, \quad \forall \bar{x} \in C_{\text{slip}} \cup C_{\text{stick}} \quad (\text{Flow})$$

$$\bar{V}(\bar{g}_i(\bar{x})) - \bar{V}(\bar{x}) \leq 0, \quad \forall \bar{x} \in D_i, i \in \{1, -1, 0\} \quad (\text{Jump})$$

- Alternative proof of Theorem C-GAS given in Bisoffi et al. [2019] using:
  - auxiliary function and state partition for **stability**
  - proof of **attractivity** using the following arguments
    - Original solutions  $x$  are uniformly bounded
    - Solutions  $\bar{x}$  of hybrid automaton  $\mathcal{H}_\delta$  semiglobally reproduces any original solution  $x$  evolving in a compact set  $\mathcal{K}(\delta)$  such that  $\lim_{\delta \rightarrow 0} \mathcal{K}(\delta) = \mathbb{R}^3$
    - Smooth Lyapunov function  $\bar{V}$  certifies global attractivity for  $\mathcal{H}_\delta$
    - Attract. for  $\mathcal{H}_\delta \Rightarrow$  semiglobal Attract.  $\Rightarrow$  Attract. of the original system
- Interesting connections with (bi)simulation concepts found in computer science

**With resets**, extended automaton includes extra variable

- Extended state  $\bar{x} := (\bar{\sigma}, \bar{\phi}, \bar{v}, \bar{q}, \bar{\tau}, \bar{a}) \in \Xi$  with logic variable  $\bar{a}$  such that  $\bar{a}\bar{v} \geq 0$

$$\Xi := \left\{ \bar{x} \in \mathbb{R}^3 \times \{-1, 0, 1\} \times [0, 2\delta] \times \{-1, 1\} \mid \bar{q}\bar{v} \geq 0, \bar{a}\bar{\phi} \geq 0, \bar{a}\bar{v} \geq 0 \right\},$$

- Hybrid automaton for overshooting solutions, wherein  $\dot{\bar{v}} \geq 0$ , then  $\bar{a} = \text{sign}(\phi)$

$$\mathcal{H}_\delta : \begin{cases} \dot{\bar{x}} = \bar{f}(\bar{x}), & \bar{x} \in \bar{C} \\ \bar{x}^+ = \bar{g}(\bar{x}), & \bar{x} \in \bar{D} \end{cases}$$

$$C_{\text{slip}} := \{\bar{x} \in \Xi : |\bar{q}| = 1\}$$

$$C_{\text{stick}} := \{\bar{x} \in \Xi : \bar{q} = 0, \bar{v} = 0, \bar{a}\bar{\phi} \leq F_s\}$$



$$D_1 := \{\bar{x} \in \bar{\Xi}: \bar{q} = 0, \bar{v} = 0, \bar{a}\bar{\phi} \geq F_s, \bar{\tau} \in [\delta, 2\delta]\}$$

$$D_{-1} := \{\bar{x} \in \bar{\Xi}: \bar{q} = 0, \bar{v} = 0, \bar{a}\bar{\phi} > F_s, \bar{\tau} \in [\delta, 2\delta]\}$$

$$D_0 := \{\bar{x} \in \mathbb{H}: |\bar{q}| = 1, \bar{v} = 0, \bar{g}\bar{\phi} < F_s\},$$

$$\bar{C} := C_{\text{slip}} \cup C_{\text{stick}}$$

$$\bar{D} := D_{-1} \cup D_0 \cup D_1$$

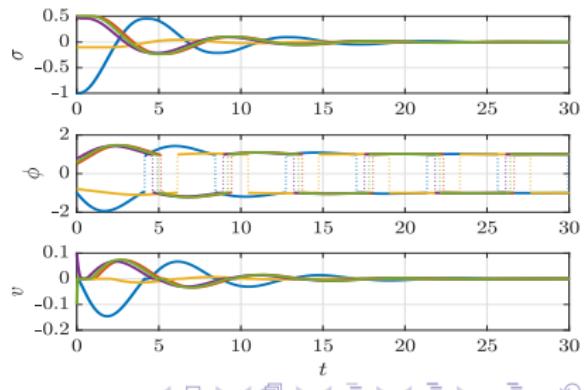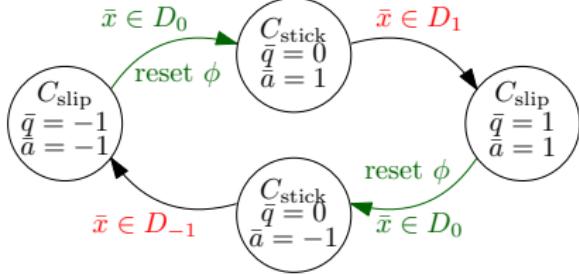

# Homogeneous automaton explains exponential convergence

- State transformation provides homogeneous hybrid dynamics

$$\bar{x} := (\bar{\sigma}, \bar{\phi}, \bar{v}, \bar{q}, \bar{\tau}, \bar{a}) \quad \mapsto \quad \hat{x} := (\hat{\sigma}, \hat{\phi}, \hat{v}, \hat{q}, \hat{\tau}, \hat{a}) = (\bar{\sigma}, \bar{\phi} - \bar{a}F_s, \bar{v}, \bar{q}, \bar{\tau}, \bar{a}).$$

- With  $\alpha = 1$ , denoting  $\hat{x}_0 = (\hat{\sigma}, \hat{\phi}, \hat{v})$ , we get partial homogeneity in  $\hat{x}_0$

$$\begin{cases} \dot{\hat{x}}_0 = A_F(\hat{q}, \hat{a})\hat{x}_0, & \hat{x} \in \hat{C} \\ \hat{x}_0^+ = A_J(\hat{q}, \hat{a})\hat{x}_0, & \hat{x} \in \hat{D} \end{cases}$$

$$\hat{C}_{\text{slip}} := \{\hat{x}: |\hat{q}| = 1\}$$

$$\hat{C}_{\text{stick}} := \{\hat{x}: \hat{q} = 0, \hat{v} = 0, \hat{a}\hat{\phi} \leq 0\}$$



$$\hat{C} := \hat{C}_{\text{slip}} \cup \hat{C}_{\text{stick}}$$

$$\hat{D}_1 := \{\hat{x}: \hat{q} = 0, \hat{v} = 0, \hat{a}\hat{\phi} \geq 0, \bar{\tau} \in [\delta, 2\delta]\}$$

$$\hat{D} := \hat{D}_{-1} \cup \hat{D}_0 \cup \hat{D}_1$$

$$\hat{D}_{-1} := \{\hat{x}: \hat{q} = 0, \hat{v} = 0, \hat{a}\hat{\phi} \geq 0, \bar{\tau} \in [\delta, 2\delta]\}$$

$$\hat{D}_0 := \{\hat{x}: |\hat{q}| = 1, \hat{v} = 0, \hat{a}\hat{\phi} \leq 0\}.$$

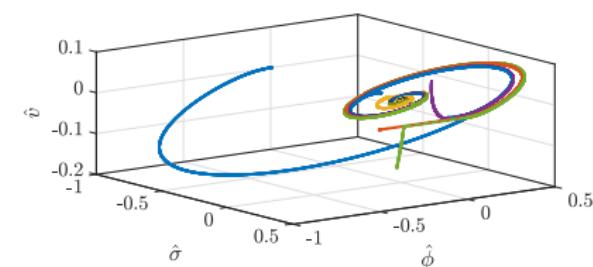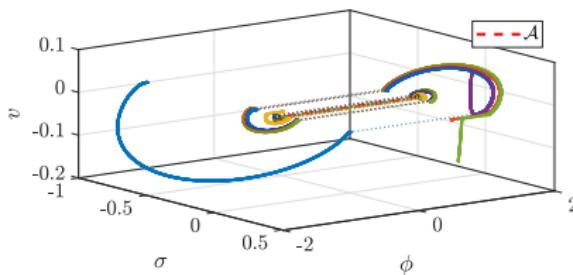


- Exploiting  $\bar{a} = \text{sign}(\bar{\phi})$ , with  $\alpha = 1$  we can prove  $\exists M > 0, \mu > 0$  satisfying

$$|(\sigma, \phi - \text{sign}(\phi)F_s, v)| \leq M e^{-\mu t} |\sigma_0|$$


for all solutions starting at stick-to-slip transition  $\hat{x}_0 = (\sigma_0, 0, 0)$ .

# Stribeck model includes extra nonlinearity

- New velocity weakening function  $\psi$  (previously zero):

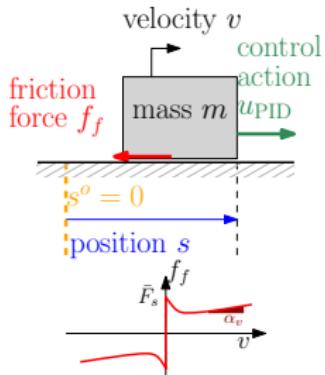

$$\begin{bmatrix} \dot{\sigma} \\ \dot{\phi} \\ \dot{v} \end{bmatrix} = \begin{bmatrix} 0 & 0 & -k_i \\ 1 & 0 & -k_p \\ 0 & 1 & -k_v \end{bmatrix} \begin{bmatrix} \sigma \\ \phi \\ v \end{bmatrix} - \begin{bmatrix} 0 \\ 0 \\ F_s \end{bmatrix} (\text{SGN}(v) + \psi(v)),$$


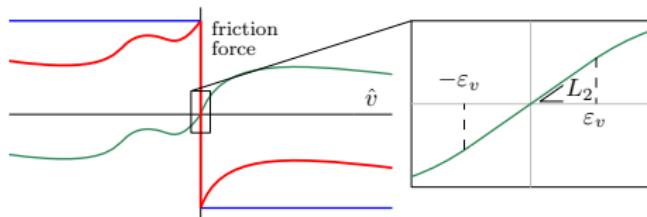


## Assumption STRIB



Assumption LIN holds ( $k_i > 0$ ,  $k_p > 0$ ,  $k_v k_p > k_i$ ). Moreover, the velocity weakening function  $\psi$  is globally Lipschitz and satisfies

- $|\psi(v)| \leq F_s$
- $v\psi(v) \geq 0$  for all  $v$
- it is linear in a small enough interval around zero  
(namely, for some  $\varepsilon_v$ ,  $|v| \leq \varepsilon_v \Rightarrow \psi(v) = L_2 v$ ).

# Stribeck “hunting instability” needs a different solution

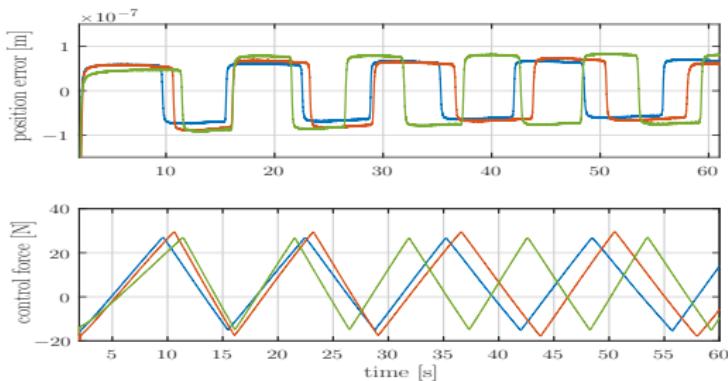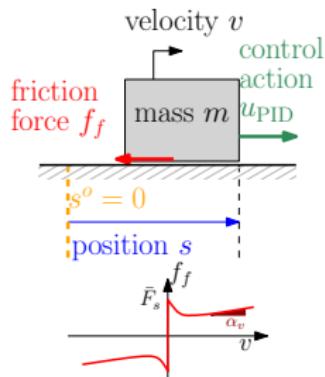


- Reset PID solution solving Coulomb is not successful for Stribeck hunting effect

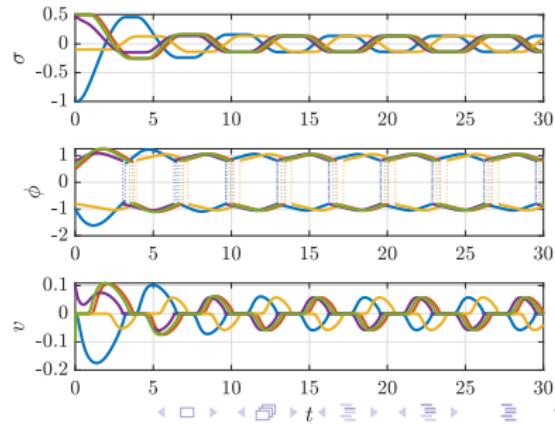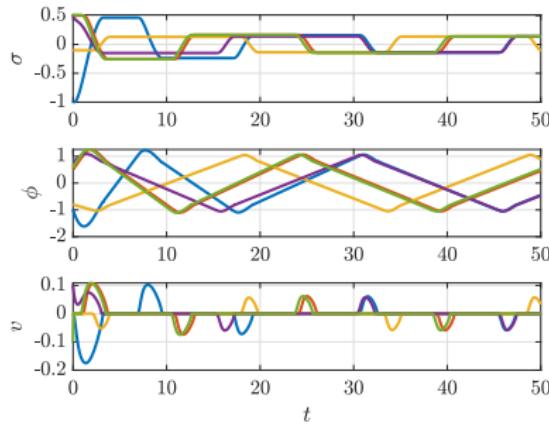

# A two-stage reset PID proposed in Beerens et al. [2022]

- Add boolean state  $b \in \{-1, 1\}$  such that  $b v \sigma \geq 0$ :
  - $b = 1$  in the overshooting phase  $v \sigma \geq 0$
  - $b = -1$  in the approaching phase  $v \sigma \leq 0$

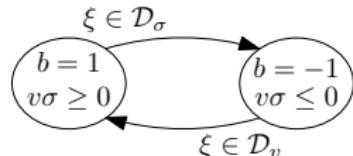

- Ensure that the integral action  $e_i$  points in the direction of position error  $s$   
This corresponds to imposing  $\phi \sigma \geq \frac{k_p}{k_i} \sigma^2$
- Overall state  $\xi := (x, b) := (\sigma, \phi, v, b)$  evolves in  $\Xi$ , where

$$\Xi := \{(x, b) \in \mathbb{R}^3 \times \{-1, 1\} : b v \sigma \geq 0, \sigma \phi \geq \frac{k_p}{k_i} \sigma^2, b v \phi \geq 0\}.$$

- Jumps at zero-crossing of  $\sigma$  and  $v$ , wherein state  $b$  alternates between  $-1$  and  $1$

$$\begin{bmatrix} \sigma^+ \\ \phi^+ \\ v^+ \\ b^+ \end{bmatrix} = g_\sigma(\xi) := \begin{bmatrix} \sigma \\ -\phi \\ v \\ -b \end{bmatrix}, \quad \xi \in \mathcal{D}_\sigma := \{\xi \in \Xi : \sigma = 0, b = 1\}$$

$$\begin{bmatrix} \sigma^+ \\ \phi^+ \\ v^+ \\ b^+ \end{bmatrix} = g_v(\xi) := \begin{bmatrix} \sigma \\ \frac{k_p}{k_i} \sigma \\ v \\ -b \end{bmatrix}, \quad \xi \in \mathcal{D}_v := \{\xi \in \Xi : v = 0, b = -1\}.$$

- Can prove that  $\phi$  is never zero along sol'n's, so  $\mathcal{D}_\sigma$  and  $\mathcal{D}_v$  robustly implemented as

$$\mathcal{D}_\sigma^r := \{\xi : \sigma \phi \leq 0, b = 1\}, \quad \mathcal{D}_v^r := \{\xi : v \phi \geq 0, b = -1\},$$

# The reset closed-loop eliminates the hunting instability



Theorem STRI-GAS (Reset-Stribeck-GAS) Beerens et al. [2022]

Under Assumption STRIB, the compact set

$$\mathcal{A}_e := \mathcal{A} \times \{-1, 1\} = \{\xi \in \Xi : \sigma = v = 0, |\phi| \leq F_s\}.$$

is  $\mathcal{KL}$ -globally asymptotically stable.

- The proof of Theorem STRI-GAS requires using the hybrid automaton trick (a new automaton, a new “smooth” Lyapunov function).

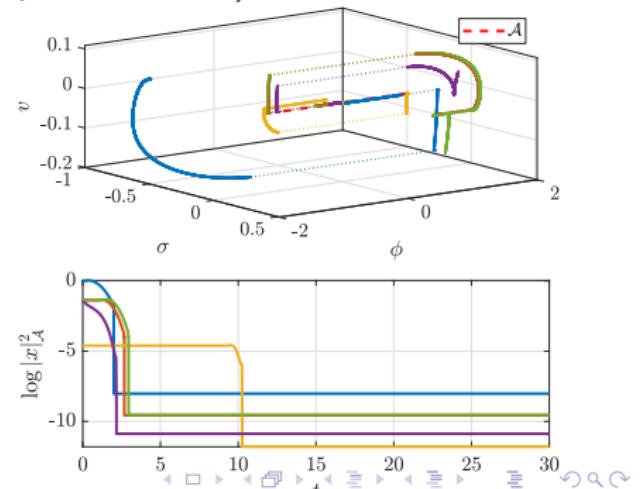
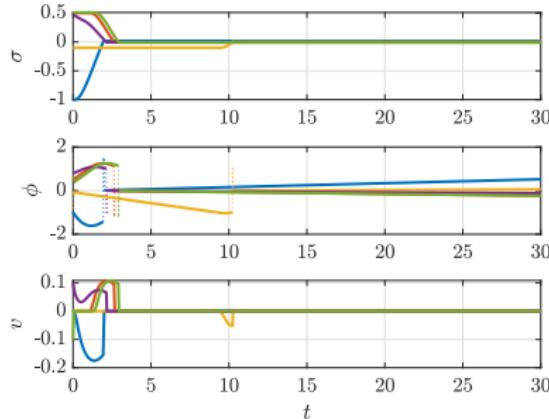


# Stribeck hybrid automaton is more sophisticated

Beerens et al. [2022]

- Extended state  $\bar{\xi}$  includes timer  $\bar{\tau}$  and logic variable  $\bar{q}$  such that  $\bar{q}\bar{v} \geq 0$

$$\bar{\xi} := (\bar{\sigma}, \bar{\phi}, \bar{v}, \bar{b}, \bar{q}, \bar{\tau}) \in \bar{\Xi} := \{\bar{\xi} \mid \bar{q}\bar{v} \geq 0, \bar{b}\bar{q}\bar{\sigma} \geq 0, \bar{\sigma}\bar{\phi} \geq \frac{k_p}{k_i}\bar{\sigma}^2, \bar{b}\bar{q}\bar{\phi} \geq 0\}.$$

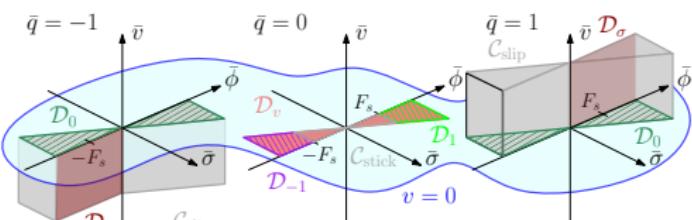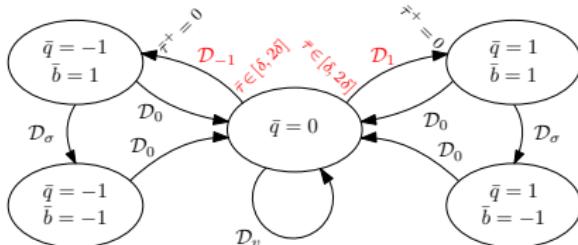

- Hybrid automaton  $\mathcal{H}_\delta$  (Stribeck, resets) – semiglobally correct

$$\mathcal{H}_\delta : \begin{cases} \dot{\bar{\xi}} = \bar{f}(\bar{\xi}), & \bar{\xi} \in \bar{\mathcal{C}} \\ \bar{\xi}^+ = \bar{g}(\bar{\xi}), & \bar{\xi} \in \bar{\mathcal{D}} \end{cases} \quad \begin{aligned} \bar{\mathcal{C}} &:= \mathcal{C}_{\text{slip}} \cup \mathcal{C}_{\text{stick}} \\ \bar{\mathcal{D}} &:= \mathcal{D}_{-1} \cup \mathcal{D}_0 \cup \mathcal{D}_1 \cup \mathcal{D}_\sigma \cup \mathcal{D}_v \end{aligned}$$

- Lipschitz Lyapunov function shows GAS of  $\bar{\mathcal{A}}_e := \{\bar{\xi} \mid \bar{\sigma} = \bar{v} = 0, \bar{\phi} \in F_s \text{SGN}(\bar{b}\bar{q})\}$

$$\begin{aligned} \bar{V}_e(\bar{\xi}) := & \begin{bmatrix} \bar{\sigma} \\ \bar{v} \end{bmatrix}^\top \begin{bmatrix} \frac{k_v}{k_i} & -1 \\ -1 & k_p \end{bmatrix} \begin{bmatrix} \bar{\sigma} \\ \bar{v} \end{bmatrix} + |\bar{q}|(\bar{\phi} - \bar{b}\bar{q}F_s)^2 + (1 - |\bar{q}|)dz_{F_s}^2(\bar{\phi}) \\ & + 2\frac{k_p}{k_i}F_s(\bar{b}\bar{q}\bar{\sigma} + (1 - |\bar{q}|)|\bar{\sigma}|) \end{aligned}$$

# Proof of Theorem STRI-GAS uses function $\bar{V}_e$

- Function  $\bar{V}_e$  is not smooth but Lipschitz  $\Rightarrow$  can use Clarke nonsmooth tools

Properties of Lipschitz  $\bar{V}_e$  are convenient

Function  $\bar{V}_e$  is **Lipschitz** and there exist  $\alpha_1, \alpha_2 \in \mathcal{K}_\infty$ ,  $c > 0$  such that:

$$\alpha_1(|\bar{\xi}|_{\bar{\mathcal{A}}_e}) \leq \bar{V}_e(\bar{\xi}) \leq \alpha_2(|\bar{\xi}|_{\bar{\mathcal{A}}_e}) \quad \forall \bar{\xi} \in \bar{\Xi} \quad (\text{Sandwich})$$

$$\bar{V}_e^\circ(\bar{\xi}) := \max_{\nu \in \partial \bar{V}_e(\bar{\xi})} \langle \nu, \bar{f}(\bar{\xi}) \rangle \leq -c\bar{v}^2, \quad \forall \bar{x} \in \mathcal{C}_{\text{slip}} \cup \mathcal{C}_{\text{stick}} \quad (\text{Flow})$$


$$\bar{V}_e(\bar{g}_i(\bar{\xi})) - \bar{V}_e(\bar{\xi}) \leq 0, \quad \forall \bar{\xi} \in \mathcal{D}_i, i \in \{1, -1, 0, \sigma, v\} \quad (\text{Jump})$$

- Proof of Theorem STRI-GAS given in Beerens et al. [2022] using:

- proof of **uniform global attractivity (UGA)** using the following arguments
  - Original solutions  $x$  are uniformly bounded (not as trivial as with Coulomb)
  - Solutions  $\bar{\xi}$  of hybrid automaton  $\mathcal{H}_\delta$  semiglobally reproduces any original solution  $\xi$  evolving in a compact set  $\mathcal{K}(\delta)$  such that  $\lim_{\delta \rightarrow 0} \mathcal{K}(\delta) = \mathbb{R}^3$
  - Lipschitz Lyapunov function  $\bar{V}_e$  certifies UGA for  $\mathcal{H}_\delta$
  - UGA for  $\mathcal{H}_\delta \Rightarrow$  semiglobal UA  $\Rightarrow$  UGA of the original system
  - UGA and strong forward invariance of  $\bar{\mathcal{A}}_e$  implies stability.**
- Interesting connections with (bi)simulation concepts found in computer science

# Experimental response confirms GAS recovery

Beerens et al. [2022]

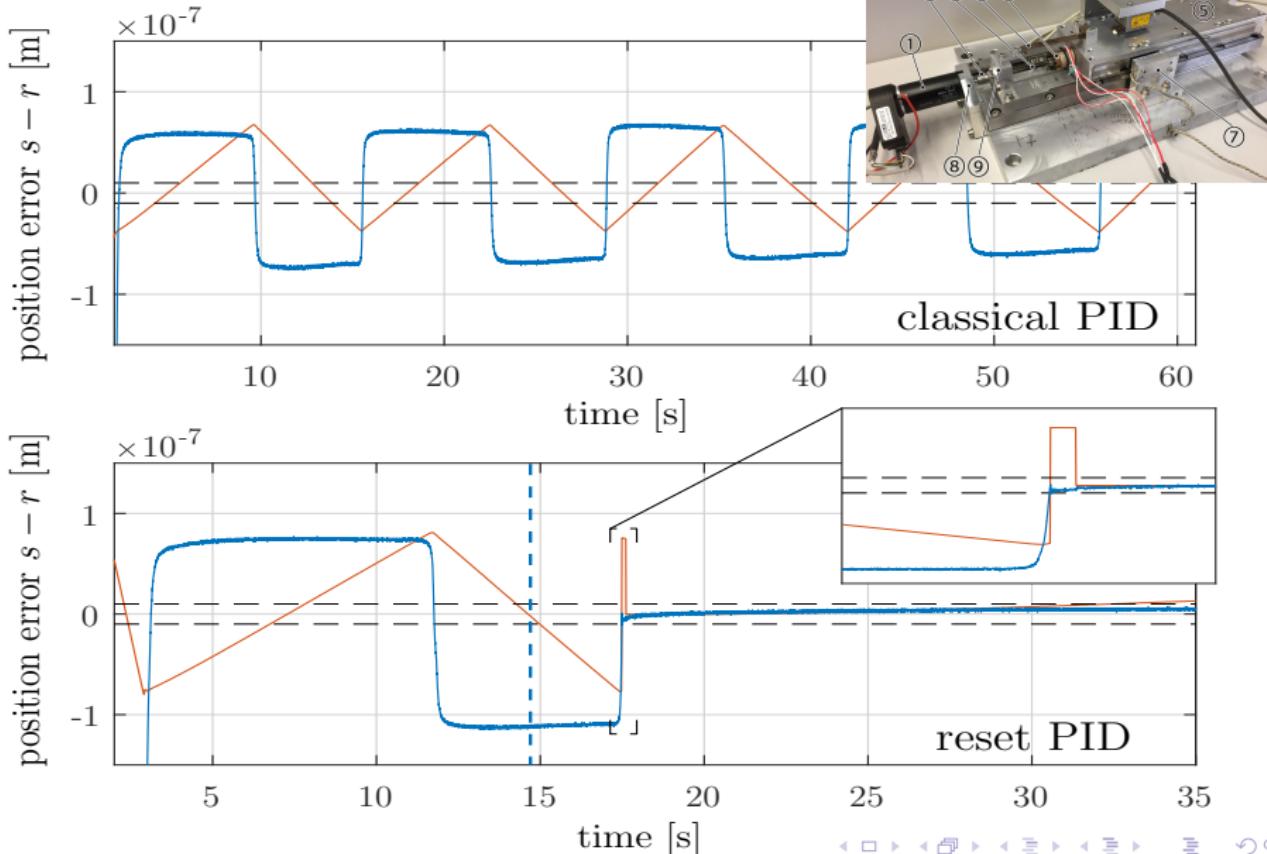

# Wrap up and acknowledgements

## Conclusions:

- Differential inclusion model for PID controlling sliding mass with Coulomb/Stribeck friction effects
- Coulomb: Lyapunov-based proof of Global Asymptotic (not exponential) Stability
- Coulomb: Reset PID improves transient response (exponential convergence)
- Stribeck: Reset PID resolves “hunting” instability
- The presented results published in a **vision article** (IFAC Annual Reviews in Control) **Bisoffi et al. [2020]**

## Future Work:

- Combine resets for exponential convergence and Stribeck
- Address the case of asymmetric friction laws

## Special thanks to the collaborators of this work:



R. Beerens



A. Bisoffi



M. Heemels



H. Nijmeijer



N. van de Wouw



Contents lists available at ScienceDirect

Annual Reviews in Control

journal homepage: [www.elsevier.com/locate/arcontrol](http://www.elsevier.com/locate/arcontrol)

### Vision article

To stick or to slip: A reset PID control perspective on positioning systems with friction

A. Bisoffi<sup>a</sup>, R. Beerens<sup>b</sup>, W.P.M.H. Heemels<sup>b</sup>, H. Nijmeijer<sup>b</sup>, N. van de Wouw<sup>b,c</sup>, L. Zaccarian<sup>d,e,f</sup>

<sup>a</sup>ENIEC and the J.C. Willems Center for Systems and Control, University of Groningen, Groningen 9747 AG, The Netherlands

<sup>b</sup>Eindhoven University of Technology, Department of Mechanical Engineering, P.O. Box 513, Eindhoven 5600MB, The Netherlands

<sup>c</sup>University of Minnesota, Civil, Environmental & Geo-Engineering Department, MN 55455, USA

<sup>d</sup>CNRS, Laboratoire des Signaux et Systèmes, Institut Polytechnique de Paris, Paris, France

<sup>e</sup>Dipartimento di Ingegneria Industriale, University of Trento, Trento 38123, Italy

### ARTICLE INFO

Article history:  
Received 16 March 2020  
Accepted 17 April 2020

### ABSTRACT

We overview a recent research activity where suitable reset actions induce stiction/PID-controlled positioning systems suffering from nonlinear frictional effects. PID feedback produces a set of equilibria whose asymptotic (but not ex certified by using a discontinuous Lyapunov-like function. With velocity weak Stribeck friction), the set of equilibria becomes unstable with PID feedback. The “plausibility” (preservation of the set of equilibria) is guaranteed by laws due to us Coulomb friction only, the discontinuous Lyapunov-like function immediately providing extreme performance improvement, preventing stability and inducing convergence of a relevant subset of the solutions. With Stribeck, a more sophisticated reset law restores global asymptotic stability of the set of equilibria, providing the hunting instability. We clarify here the main steps of the Lyapunov-based reset-enhanced PID controllers. These proofs involve building semiglobal hybrid solutions in the form of hybrid automata whose logical variables enable transforming discontinuous function into smooth or at least Lipschitz ones. Our theoretical extensive simulations and experimental validation on an industrial nano-paint

© 2020 Elsevier

# Bibliography I

- R. Beerens, A. Bisoffi, L. Zaccarian, M. Heemels, H. Nijmeijer, and N. van de Wouw. Reset integral control for improved settling of PID-based motion systems with friction. *Automatica*, 107:483–492, 2019.
- R. Beerens, A. Bisoffi, L. Zaccarian, H. Nijmeijer, M. Heemels, and N. van de Wouw. Reset PID design for motion systems with Stribeck friction. *IEEE Transactions on Control Systems Technology*, 30(1):294–310, 2022.
- A. Bisoffi, M. Da Lio, A.R. Teel, and L. Zaccarian. Global asymptotic stability of a PID control system with Coulomb friction. *IEEE Transactions on Automatic Control*, 63(8):2654–2661, 2018.
- A. Bisoffi, R. Beerens, L. Zaccarian, M. Heemels, H. Nijmeijer, and N. van de Wouw. Hybrid model formulation and stability of a PID-controlled motion system with Coulomb friction. In *Symposium on Nonlinear Control Systems (NOLCOS)*, pages 116–121, Vienna, Austria, September 2019.
- A. Bisoffi, R. Beerens, M. Heemels, H. Nijmeijer, N. van de Wouw, and L. Zaccarian. To stick or to slip: A reset PID control perspective on positioning systems with friction. *IFAC Annual Reviews in Control*, 49:37–63, 2020.